
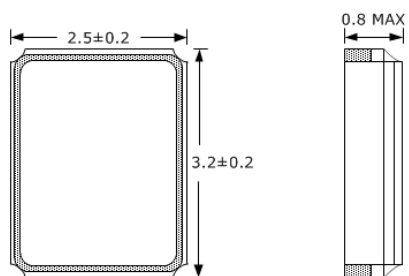
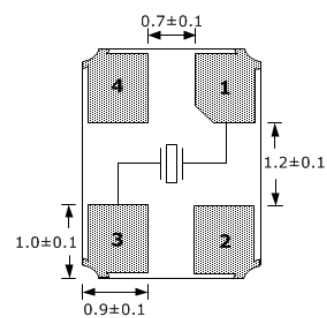


FEATURES	APPLICATIONS
<ul style="list-style-type: none"> - $\pm 10\text{ppm}/\pm 10\text{ppm}$ (Tolerance/Stability) Available - Ultra-Miniature Package - Glass Sealed - AT-Cut Fundamental - RoHS Compliant - Tape and Reel 	<ul style="list-style-type: none"> - Automotive Applications - PCMCIA - Wireless Applications - High Density Applications

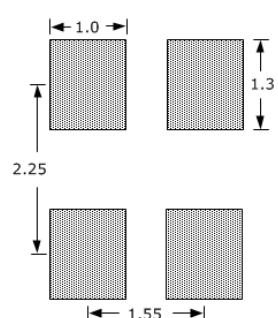

PART NUMBERING GUIDE	
<p>SUNTSU CRYSTAL → SXT 3G 4 18 A A 48 - 16.000M ← FREQUENCY (MHz)</p> <p>3.2mm x 2.5mm GLASS SEALED 4 PAD</p> <p>LOAD CAPACITANCE S: SERIES 7 - 30: 7pF - 30pF</p> <p>FREQUENCY TOLERANCE A: $\pm 50\text{ppm}$ B: $\pm 30\text{ppm}$ C: $\pm 25\text{ppm}$ D: $\pm 20\text{ppm}$ E: $\pm 15\text{ppm}$ F: $\pm 10\text{ppm}$</p> <p>Cage Code: 4GUT4 To customize your parameters contact a Suntsu representative. * For frequency stability option F contact a Suntsu representative. ** For operating temperatures up to $-55\sim 125^\circ\text{C}$ contact a Suntsu representative.</p>	<p>OPERATING TEMPERATURE RANGE** 07: 0°C to $+70^\circ\text{C}$ 16: -10°C to $+60^\circ\text{C}$ 17: -10°C to $+70^\circ\text{C}$ 27: -20°C to $+70^\circ\text{C}$ 38: -30°C to $+85^\circ\text{C}$ 48: -40°C to $+85^\circ\text{C}$</p> <p>FREQUENCY STABILITY A: $\pm 50\text{ppm}$ B: $\pm 30\text{ppm}$ C: $\pm 25\text{ppm}$ D: $\pm 20\text{ppm}$ E: $\pm 15\text{ppm}$ F: $\pm 10\text{ppm}$*</p>


ELECTRICAL PARAMETERS	UNITS	MIN.	TYP.	MAX.	REMARKS
Frequency Range	MHz	10		60	AT-Cut Fundamental.
Frequency Tolerance at $+25^\circ\text{C}$	ppm	-10		+10	See part numbering guide for options.
Frequency Stability vs. Operating Temperature (Ref. 25°C) vs. Aging	ppm	-10		+10	See part numbering guide for options.
		-3		+3	First year @ $+25^\circ\text{C}$.
Operating Temperature	$^\circ\text{C}$	-40		+85	See part numbering guide for options.
Storage Temperature	$^\circ\text{C}$	-40		+125	
Load Capacitance	pF	8		18	See part numbering guide for options.
Shunt Capacitance	pF			5	
Drive Level	μW		10	200	
Insulation Resistance	M Ω	500			@ $100\text{V}_{\text{DC}} \pm 15\text{V}$.
Equivalent Series Resistance	10.000MHz			250	AT-Cut Fundamental.
	11.000MHz ~ 15.999MHz			100	AT-Cut Fundamental.
	16.000MHz ~ 25.999MHz			70	AT-Cut Fundamental.
	26.000MHz ~ 29.999MHz			60	AT-Cut Fundamental.
	30.000MHz ~ 60.000MHz			50	AT-Cut Fundamental.

OUTLINE DRAWING		
	<p>ELECTRODE ARRANGEMENT (BOTTOM VIEW)</p> 	<p>RECOMMENDED LAND PATTERN</p> 
NOTE: Dimensions in millimeters (mm).		


ENVIRONMENTAL & MECHANICAL SPECIFICATIONS

Temperature Cycling	MIL-STD-883, Method 1010, Condition B
Fine Leak Test	MIL-STD-883, Method 1014, Condition A
Gross Leak Test	MIL-STD-883, Method 1014, Condition C
Mechanical Shock	MIL-STD-883, Method 2002, Condition B
Vibration	MIL-STD-883, Method 2007, Condition A
Moisture Resistance	MIL-STD-883, Method 1004
Moisture Sensitivity	J-STD-020, MSL 1
Resistance to Soldering Heat	MIL-STD-202, Method 210, Condition K
Resistance to Solvents	MIL-STD-202, Method 215
Solderability	MIL-STD-883, Method 2003

REFLOW PROFILE

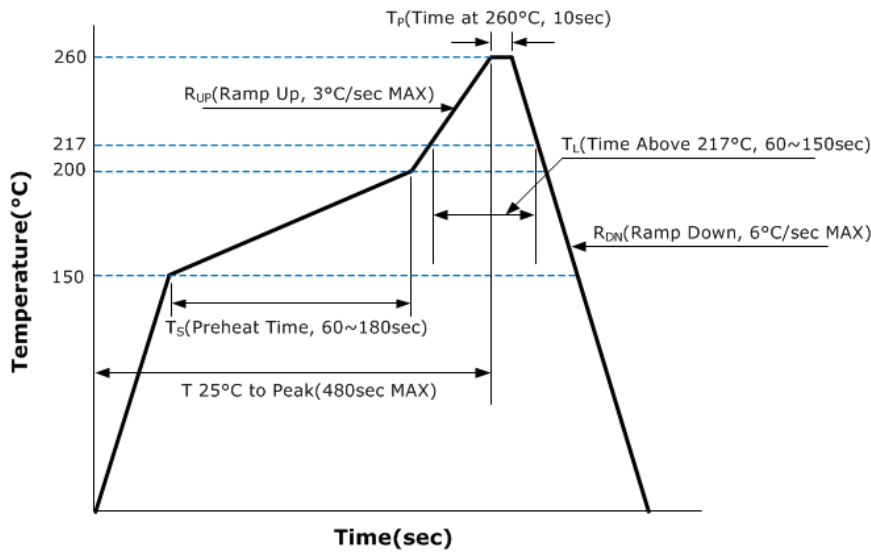


MARKING

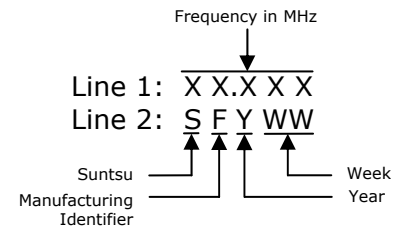

TAPE AND REEL DIMENSIONS

3,000pcs/reel

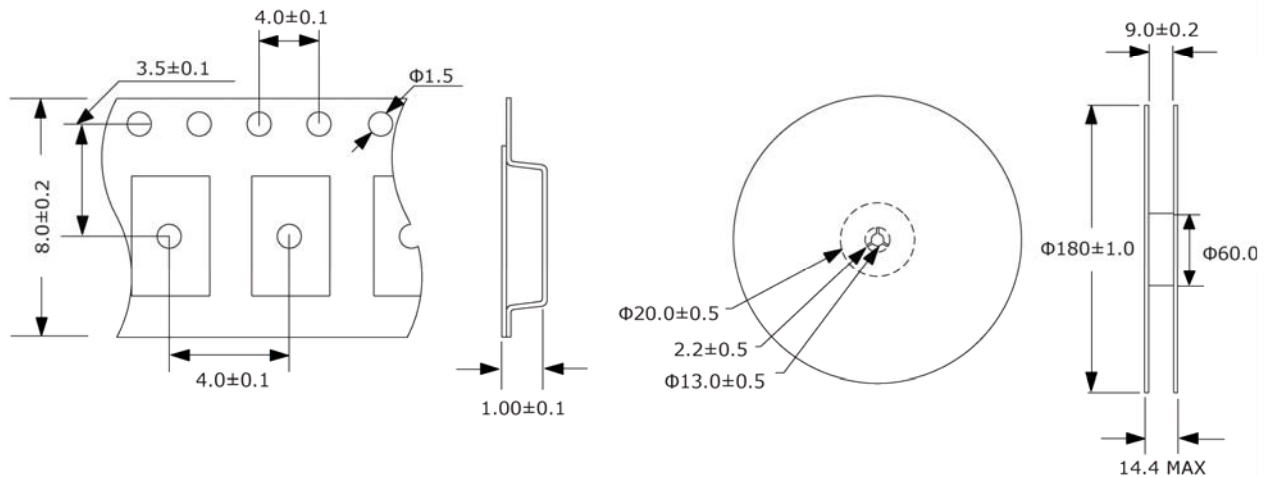

NOTE: Dimensions in millimeters (mm); drawing is not to scale.