


Features
<ul style="list-style-type: none"> <li>±10ppm/±10ppm (Tolerance/Stability) Available</li> <li>Ultra-Miniature Package</li> <li>Glass Sealed</li> <li>AT-Cut Fundamental</li> <li>Tape and Reel</li> </ul>

Applications
<ul style="list-style-type: none"> <li>Microprocessors</li> <li>PCMCIA</li> <li>Communication</li> <li>Test Equipment</li> </ul>



**Part Numbering Guide**

**SXT 6G 2 18 A A 48 T - 24.000M**

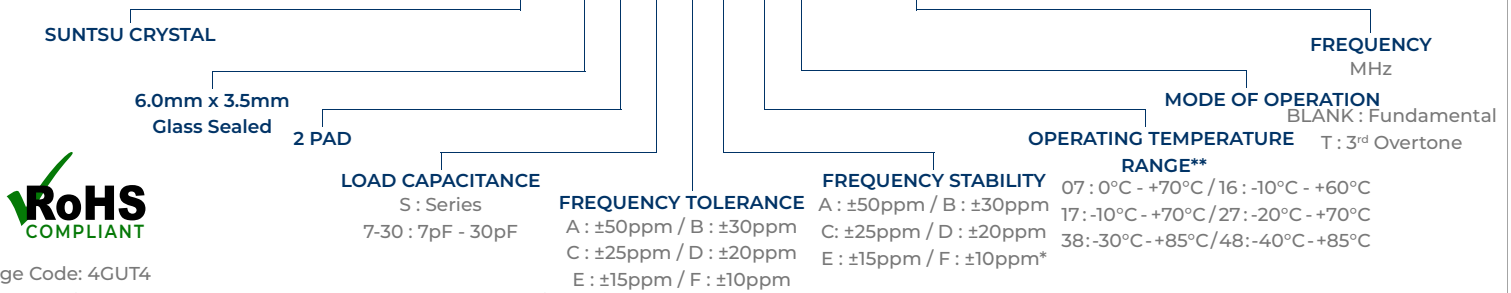

Cage Code: 4GUT4




To customize your parameters contact a Suntsu representative.

\* For frequency stability option F contact a Suntsu representative. \*\* For operating temperatures of -55-125°C a Suntsu representative.

Electrical Parameters	Units	Minimum	Typical	Maximum	Remarks
Frequency Range	MHz	8		50	AT-Cut Fundamental.
Frequency Range	MHz	40		80	3 <sup>rd</sup> Overtone.
Frequency Tolerance at +25°C	ppm	-10		+10	See part numbering guide for options.
Frequency Stability v's Op Temp	ppm	-10		+10	First year @ +25°C.
Frequency Stability v's Aging	ppm	-3		+3	
Operating Temperature	°C	-40		+85	See part numbering guide for options.
Storage Temperature	°C	-40		+125	
Load Capacitance	pF	7		30	See part numbering guide for options.
Shunt Capacitance	pF			7	
Drive Level	µW		100	500	
Insulation Resistance	MΩ	500			@ 100VDC ± 15V.
8.000MHz ~ 9.999MHz	Ω			100	AT-Cut Fundamental
ESR - 10.000MHz ~ 15.999MHz	Ω			60	AT-Cut Fundamental
16.000MHz ~ 50.999MHz	Ω			40	AT-Cut Fundamental
40.000MHz ~ 80.000MHz	Ω			70	3 <sup>rd</sup> Overtone.



**Outline Drawing & Recommended Landed Pattern**

All dimensions are in millimeters (mm) unless otherwise noted. Drawings are not to scale.

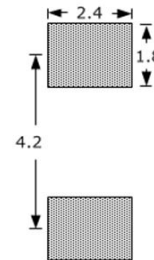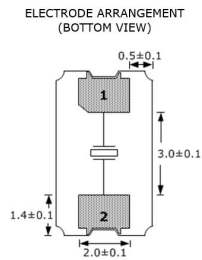

Environmental Specifications		Mechanical Specifications	
Temperature Cycling	MIL-STD-883, Method 1010, Condition B	Mechanical Shock	MIL-STD-202, Method 213, Condition B
Fine Leak Test	MIL-STD-883, Method 1014, Condition A	Vibration	MIL-STD-883, Method 2007, Condition A
Gross Leak Test	MIL-STD-883, Method 1014, Condition C	Resistance to Soldering Heat	MIL-STD-202, Method 210, Condition K
Moisture Resistance	MIL-STD-883, Method 1004	Resistance to Solvents	MIL-STD-202, Method 215
Moisture Sensitivity	J-STD-020, MSL 1	Solderability	MIL-STD-883, Method 2003

**Reflow Profile & Part Marking**

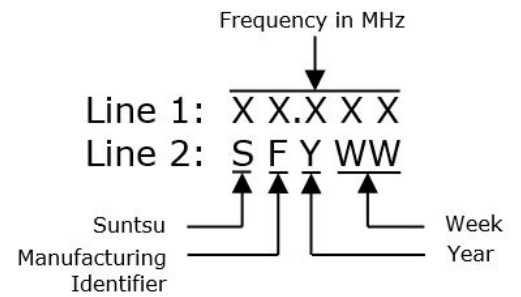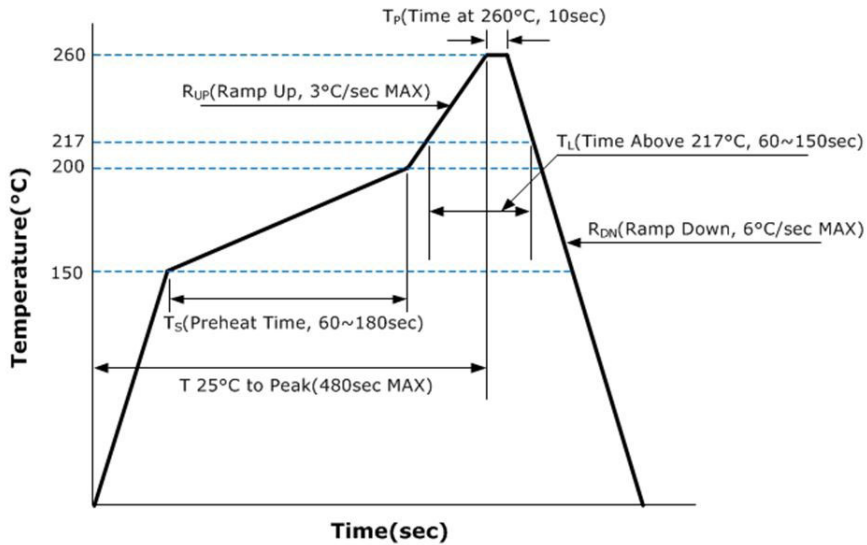

**Tape And Reel Dimensions**

All dimensions are in millimeters (mm) unless otherwise noted. Drawings are not to scale.

3,000pcs / Reel

